


8055



SOCIALIZING

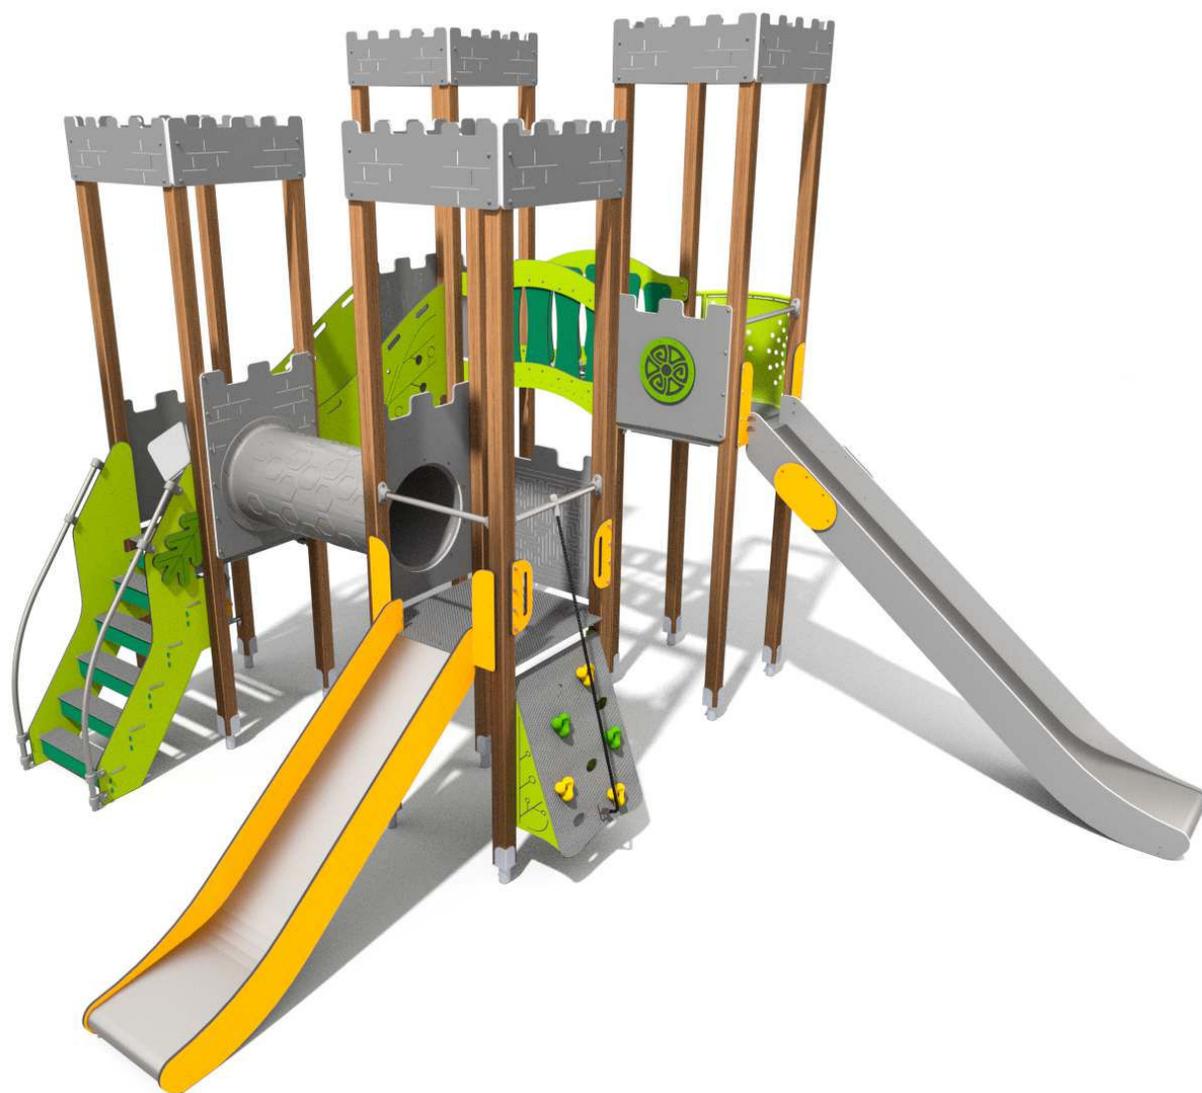

CLIMBING




SLIDING

INFORMATION ABOUT THE PRODUCT


Dimensions	575 x 523 cm
Safety zone	943 x 893 cm
Safety zone area	56 m ²
Overall height	410 cm
Free fall height	200 cm
Amount of users	20
Product complies with EN 1176-1:2017-12	YES
Availability of spare parts	YES
Age range	3-12

According to EN 1176-1:2017 norm, the product requires applying a safety surface according to the product's free fall height.

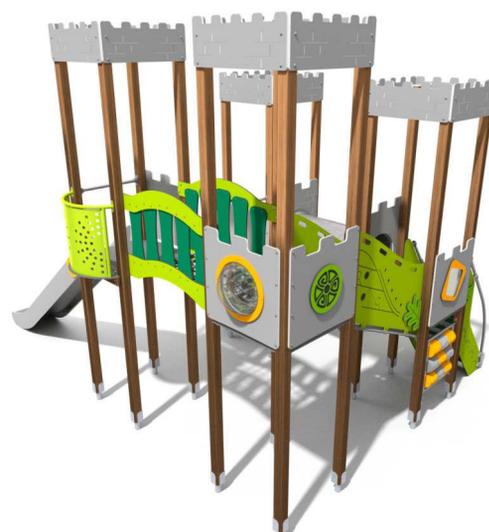

8055

INFORMATION FOR ARCHITECTS

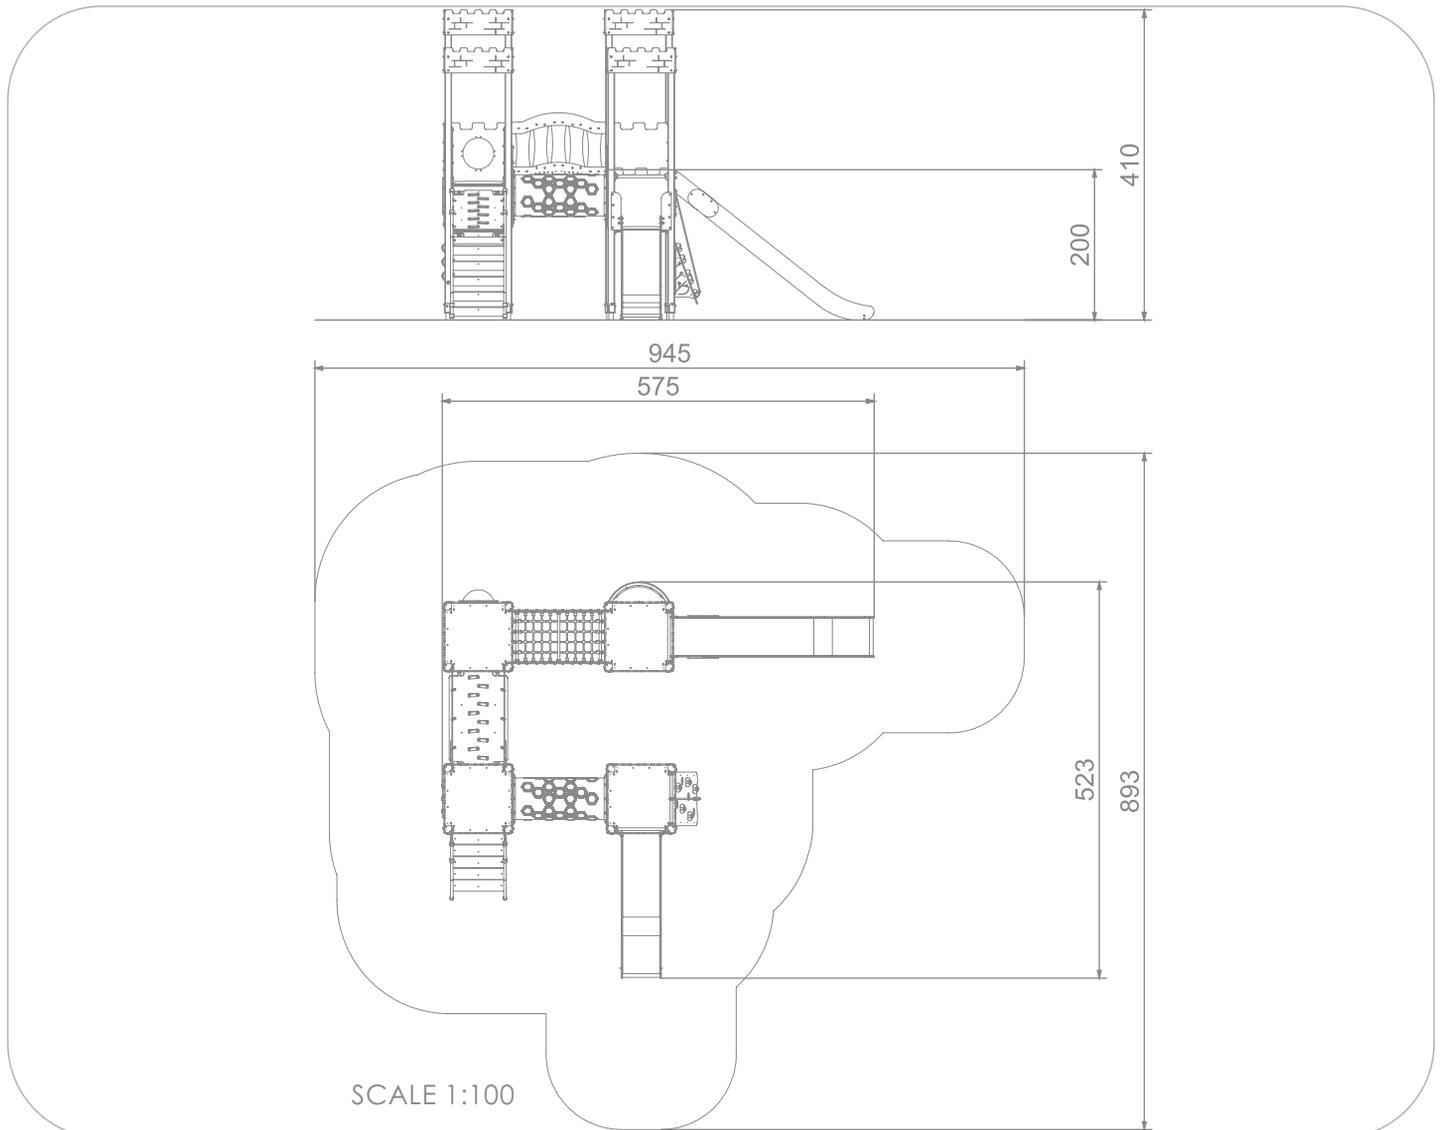

MATERIALS:

SOFT CONIFER WOOD CORELESS, GLUED IN LAYERS WITH POLYURETHANE GLUES, TOTALLY RESISTANT TO WATER.	WOODEN POSTS ANCHORED TO THE GROUND WITH POWDER GALVANIZED AND POWDER COATED STEEL ANCHORS.	PLATES OF THE WALLS MADE OF COLOURFUL TRIPLE LAYERED 15 MM HDPE POLYETHYLENE, IN THE HIGHEST QUALITY, TOTALLY DAMP-PROOF.	PATENTED SYSTEM OF CONNECTORS AND CLAMPS MADE OF STRONG ALUMINIUM ALLOY.	PERFORATED STEEL SHEET GALVANISED AND POWDER COATED WITH POLYESTER PAINT QUALICOAT ATTESTED.	THE TIC TAC TOE GAME IS MADE OF POLYETHYLENE ROTATIONALLY MOLDED WITH SYMBOLS ON THE FORM.
					
ANTI-SLIP ANTHRACITE 10MM HPL PLATFORM PLATE WITH A VERY HIGH RESISTANCE TO WEATHER CONDITIONS AND ATTRITION.	SLIDES MADE OF STAINLESS STEEL AISI 304, METAL SHEET WITH A THICKNESS OF 2 MM FORMED IN A CNC TECHNIQUE.	CLIMBING ROCKS MADE OF CHIPPINGS AND COLOURFUL POLYESTER RESIN.	HEMISPHERIC WINDOW WITH A DIAMETER OF 400 MM.	TUBE MADE OF LDPE POLYETHYLENE ROTATIONALLY MOLDED WITH THE INNER DIAMETER OF 53,3 CM AND THE LENGTH OF 125 CM.	CONNECTING ELEMENTS LIKE SCREWS, NUTS, WASHERS MADE OF STAINLESS STEEL.
					

